



TW600A




TW600B




TW600C



TW603A

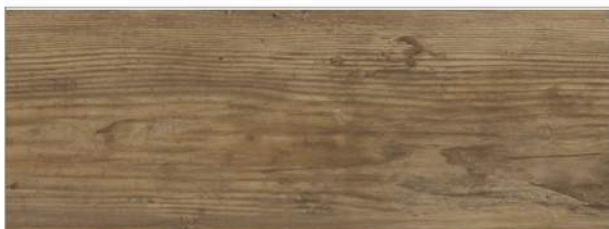

TW603B

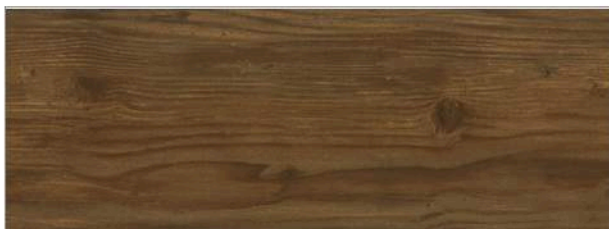

TW603C




TW601A




TW601B



TW601C

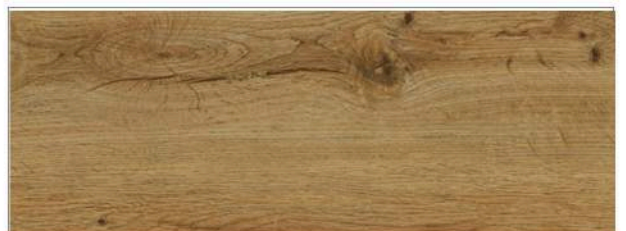

TW604A

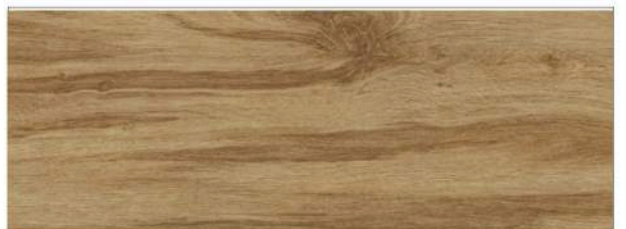

TW604E



TW604G

## Application


- Commercial building or public building flooring
- School and kindergarten
- Hospital, drugstore and manufacturing company
- Offices, intelligent buildings and access floor
- Electronic assembly factories and test room
- Control room in power plants, telephone offices
- Retail shops, clinics and therapy centres
- Residential apartments and landed properties



## Technical Data

Test Item	Unit	Sample	Test Results	Test Method	
Length	mm	1	950.0	KS M 3802	
Width	mm	1	184.1	KS M 3802	
Thickness	mm	1	2.97	KS M 3802	
Variation length due to heating (Horizontal/Vertical) Directions	%	1	0.04 / 0.03	KS M 3802	
Variation length due to water absorption (Horizontal/Vertical) Directions	%	1	0.09 / 0.06	KS M 3802	
Percentage of loss on heating	%	1	0.2	KS M 3802	
Staining Resistance	Soybean Oil	-	1	No defect	KS M 3802
	Lubricating Oil	-	1	No defect	KS M 3802
	95% Ethanol	-	1	No defect	KS M 3802
	Cement Paste	-	1	No defect	KS M 3802
	10% Aqueous Ammonia	-	1	No defect	KS M 3802
	5% Acetic Acid	-	1	No defect	KS M 3802
	Cow's Milk	-	1	No defect	KS M 3802
	5% hydrochloric Acid	-	1	No defect	KS M 3802
	Kerosene	-	1	No defect	KS M 3802
	Soy Sauce	-	1	No defect	KS M 3802
Indentation	20°C	mm	1	0.36	KS M 3802
	40°C	mm	1	0.66	KS M 3802
Residual Indentation		1	1.7	KS M 3802	

## Dimension/Structure

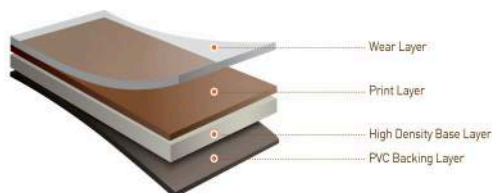

Type	Width	Length	Thickness	Wear Layer	Packing
Wood Plank	184mm	950mm	3mm	0.3mm	3.32m <sup>2</sup> /19pcs/box