


Installation Guide / Manual (AVA-316-RF)



All controls support 230V/50Hz


AVA-316 15-Channel Radio Frequency Remote

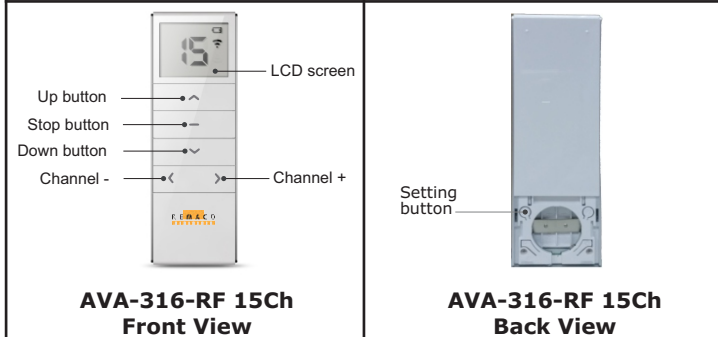

Description	AVA-316-RF
Input Voltage	3V (CR2450)
Emission Frequency	433MHz
Emission Power	10milliwatt
Work Temperature	-10°C - 50°C
Emission Distance	Open 200m, two walls 35m

Notice: The RF remote should not expose to moisture to prolong life span of battery. We recommend to replace with same type of battery as not to affect distance sensitivity performance of remote control. Remaco is environmental-friendly company, we strongly encourage dispose battery in recycling centre.

Setting Number of Channels Used AVA-316 15-Channel RF Remote

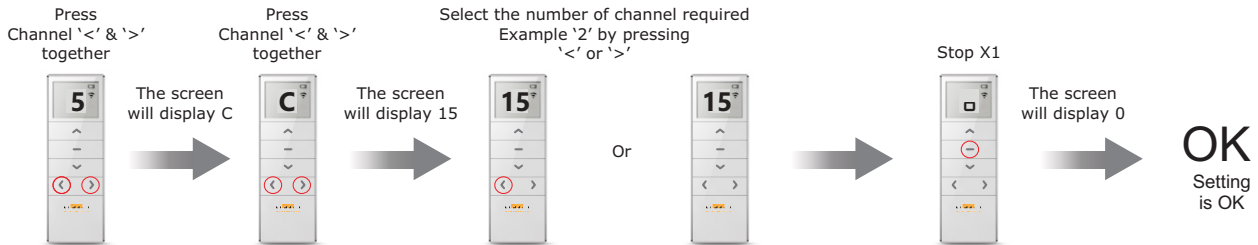

OPTION-1

AVA-316 compatible with AVA-350A Receiver (For 24Vdc Motor)



AVA-350A RF Receiver (For 24 Vdc Motor)

Pairing AVA-315-RF 1Ch with AVA-350A

