

Features:




Rental/Fix




1200 nits




3840 Hz




Pixel/Dot Pitch
1.9-3.9mm




Front/Rear
Access

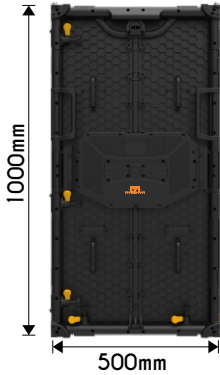

Rear Access

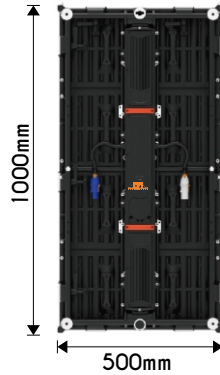

Front Access




500mm

The **LED-Professional or LED-P Series** is suitable used for indoor fixed and rental application.

The LED-P Series is designed to be slim and light weight. It is available in two (2) sizes. The LED module include features like fast locking systems, pre-alignment, handle bar and most importantly the front and rear service access.

Optional accessories like hanging mechanism, wall mount structure and mobile cart are also available.

LED-P

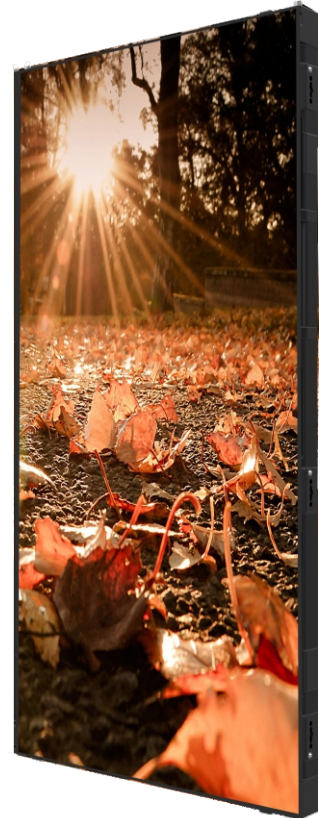


Setup and Dismantle




Positioning pin



Fast locking systems

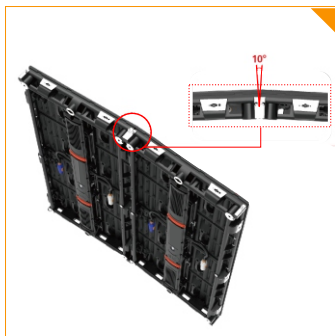

Curve Wall with Angle Coupler

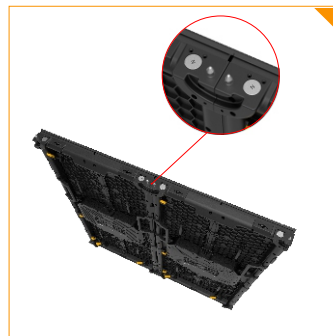

Straight Wall



Front and rear service access

Optional



Mobile Carts



Wedge Cabinet Design



Separate PDU and modular design of power and signal



Stacking Systems



Hanging Systems

Specifications

LED-Professional	LED-P-P1.9	LED-P-P2.5	LED-P-P2.9	LED-P-P3.9
Pixel/Dot Pitch	1.9mm	2.5mm	2.9mm	3.9mm
Refresh Rate	3840 Hz	3840 Hz	3840 Hz	3840 Hz
Brightness	>800 nits	>1200 nits	>1200 nits	>1200 nits
Physical Density	262,144 pixels/m ²	160,000 pixels/m ²	112,896 pixels/m ²	65,536 pixels/m ²
Resolution Module (Width x Height)	256 x 128 pixels	200 x 100 pixels	168 x 84 pixels	128 x 64 pixels
Resolution Cabinet (Width x Height)	Type 1: 256 x 512 pixels	Type 1: 200 x 400 pixels	Type 1: 168 x 336 pixels	Type 1: 128 x 256 pixels
	Type 2: 256 x 256 pixels	Type 2: 200 x 200 pixels	Type 2: 168 x 168 pixels	Type 2: 128 x 128 pixels
Contrast Ratio	3000:1	3000:1	3000:1	3000:1
Viewing Angle	110°/110°	110°/110°	110°/110°	110°/110°
Input Option	DVI, HDMI, SDI, VGA	DVI, HDMI, SDI, VGA	DVI, HDMI, SDI, VGA	DVI, HDMI, SDI, VGA
Dimension Module (Width x Height)	500 x 250mm	500 x 250mm	500 x 250mm	500 x 250mm
Dimension Cabinet (W x H x Depth)	Type 1: 500 x 1000 x 75mm	Type 1: 500 x 1000 x 75mm	Type 1: 500 x 1000 x 75mm	Type 1: 500 x 1000 x 75mm
	Type 2: 500 x 500 x 75mm	Type 2: 500 x 500 x 75mm	Type 2: 500 x 500 x 75mm	Type 2: 500 x 500 x 75mm
Weight	8 kgs	8 kgs	8 kgs	8 kgs
Power Usage Average	60W	60W	60W	100W
Power Usage Maximum	180W	180W	180W	300W
Operating Temperature	-10°C to 45° C	-10°C to 45° C	-10°C to 45° C	-10°C to 45° C
Input Voltage	110 to 230Vac, 50-60Hz	110 to 230Vac, 50-60Hz	110 to 230Vac, 50-60Hz	110 to 230Vac, 50-60Hz
Waterproof Rating	IP30	IP30	IP30	IP30

* Pictures are for illustration purposes, actual items will vary without notice