



TAS-900B


- Ease of installation
- Heavy-duty and durable
- Adjustable setting for tilting and height extension
- Braked wheel as per hospital standard






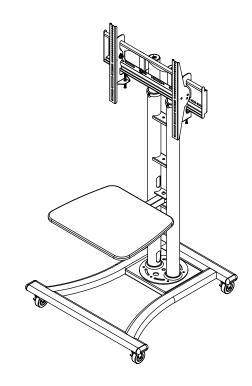







SPECIFICATIONS									
FIT	LOAD CAPACITY	ORIENTATION	VESA COMPLIANCE	BASE	MAXIMUM HEIGHT	AVAILABLE COLOR			
	Å	C.J	••••	→ ←	 ‡				
40-70" TVs	80 kg	Landscape	Up to 600mm x 405mm	730mm to 740mm	1750mm Center of the Screen Image	Black			


www.remacotech.com Tel: 6366 9266 Fax: 6366 9280 Email: remaco@remacotech.com



TAS-901

Features


- Ease of installation
- Heavy-duty and durable
- Adjustable setting for tilting and height extension
- Braked wheel as per hospital standard

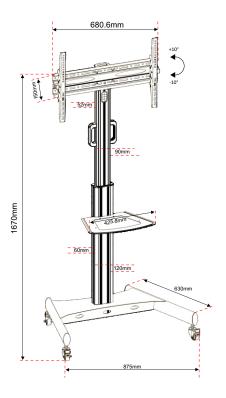








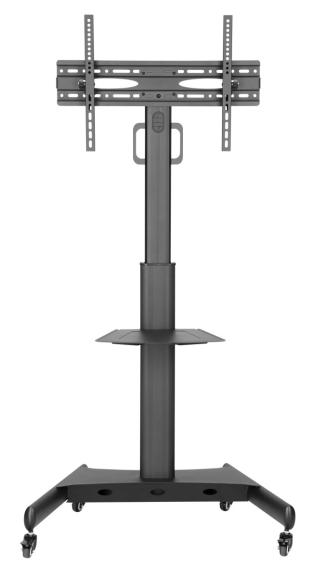

Accessories







Height Adjustable Shelf



Rotary Knob



Integrated Cable Management

SPECIFICATIONS									
FIT	LOAD CAPACITY	ORIENTATION	VESA COMPLIANCE	TILT	MAXIMUM HEIGHT	AVAILABLE COLOR			
	Å	[\f\]	••••	-1/-					
32-65" TVs	35 kg	Landscape	Up to 600mm x 400mm	+10° to -10°	1670 mm Center of the	Black			

Tel: 6366 9266 Fax: 6366 9280 www.remacotech.com Email: remaco@remacotech.com



- Ease of installation
- Heavy-duty and durable
- Adjustable setting for tilting and height extension
- Wheel Plate Mount Leveling Caster with Hard Wheel Side Access









TAS-902C

TAS-903C

TAS-904C

TAS-905C

Trolley with Apple-shaped Base

Application: LED Screen

Trolley with Arc Base

Application: **LED Screen** Single LCD Panel


Double LCD Video Wall

Trolley with Arc Base

Application: LED Screen Single LCD Panel Double LCD Video Wall **Trolley with Horse Shoe Base**

Application: Single LCD Panel Double LCD Video Wall



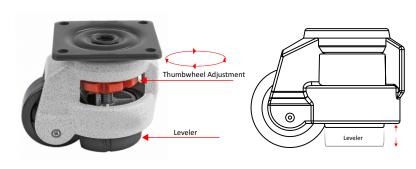

* The caster uses a leveler to secure it to the floor. Once the pad is lowered, the application will not move. These particular leveling casters have a thumbwheel adjustment. Turn the wheel with your thumb to easily raise or lower the anti-vibration pad.

www.remacotech.com Email: remaco@remacotech.com Tel: 6366 9266 Fax: 6366 9280



