

All Hybrid DVR

16CH

DHR-168R


Picture



Feature

- H.264 Video & G.711 Audio Compression
- 16CH All Hybrid DVR
- Max. 4M HD Camera and 5M IP Camera Input
- UHD(4K) Display(Only HDMI)
- Smartphone application for iPhone and Android phone
- Audio input(16)/output(1), Alarm Input(16)/Output(2,14TTL)
- P2P, RS-485 for PTZ camera, Digital Zoom
- Max. 8HDD (e-SATA with 8HDD Bay: Option)

Dimensions

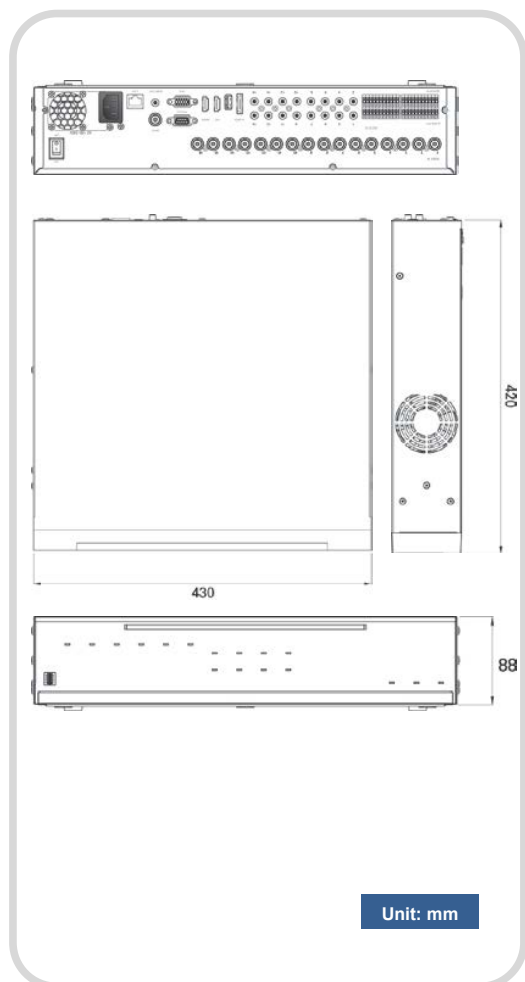

Unit: mm

Specifications

Model		DHR-168R
Operating System		Embedded Linux
Video	Input	16CH/ HD-SDI, EX-SDI(1/2), AHD, TVI, Analog, IP(Max. 4ch/5M)
	Output Resolution	2 HDMI, 1 VGA, 1 Composite 1280x1024, 1280x720, 1920x1080, UHD(HDMI Only)
Audio	Input/Output	16CH RCA Input/1CH RCA Output
Compression	Algorithm	H.264 for video, G.711 for audio
Stream	Dual	Support
Recording	Resolution	4M, 3M/12(15)fps 1080p, 720p, 960H /25(30)fps
	Speed	1080P(Real Time), 4M(Half Real Time),
	Mode	Schedule/Normal/Motion
Digital	Zoom	Live/Playback
HDD	Management	8 SATA HDD, 1 e-SATA
ODD	Option	7 SATA HDD, 1 e-SATA
Alarm	Input / Output	16/2 Relay, 14 TTL
Backup	Interface	USB 2.0x2(Front), USB 2.0x1(Back)
	Backup Device	External HDD, CD & DVD RW, Network, Thumb Drive
Playback	Display	1, 4, 6, 8, 9, 13, 16
	Search mode	Calendar, Event, POS, Panorama, Thumbnail
	Fast / Slow Speed	Normal, REW & FF [Record Speed x2, x4, x8, x16, x32, x64, x1/2, x1/4], Frame to frame, Pause
Network	Protocol	P2P, Static IP, DHCP & DDNS, NTP, SMTP, NFS
	interface	10M/100M/1000M Base - Tx Ethernet (RJ-45)
	Max connector	8 users
Access Type	Smart Phone Application (Android, iOS) / Web Viewer / CMS	
PTZ	Pan/Tilt/Zoom	RS485
System Operation		Remote Controller, Mouse
Operation Temp. / Humidity		5~40°C (41~104F) / 20% ~ 85% RH
Dimension		430(W) x 420(D) x 88(H) mm
Weight		7Kg
Power Consumption		150W
Power		100~240VAC 50Hz/60Hz

Re-Seller: **SIN CHEW ALARM PTE LTD**



10 Upper Aljunied Link #06-02/03
Singapore 367904
Tel: (65) 62872788 Fax: (65) 62870856
Email: enquiry@sinchewalarm.com
http://www.sinchewalarm.com