

2/4 Megapixel H.265 Vandal-proof Mini Dome Network Camera





MS-C2973-PB/MS-C4473-PB



KEY FEATURES

- Ultra WDR up to 120dB
- H.265 High Efficiency Video Coding
- Built-in ICR Filter for Day/Night switching
- Built-in web server for IE/Firefox/Chrome/Safari preview
- 3D-DNR, Privacy Masking and Motion Detection
- Micro SD/SDHC/SDXC card local storage support
- Weather-proof IP67 and vandal-proof IK09-rated metal housing
- Built-in efficient IR LEDs, IR distance up to 20m
- Built-in 802.3af Compliant PoE
- Built-in Microphone
- Support ONVIF Profile S

DIMENSIONS (mm)

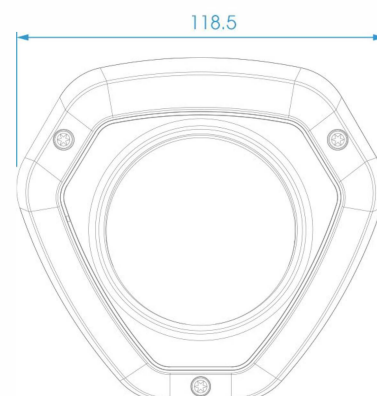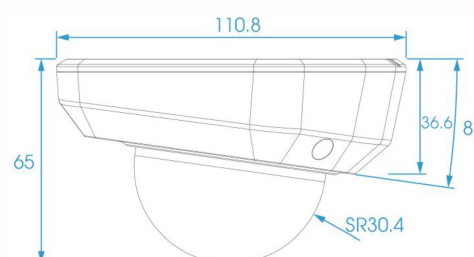

SUPPORTED BROWSERS



Re-Seller: SIN CHEW ALARM PTE LTD
 10 Upper Aljunied Link #06-02/03
 Singapore 367904
 Tel: (65) 62872788 Fax: (65) 62870856
 Email: enquiry@sinchewalarm.com
<http://www.sinchewalarm.com>

	Model	MS-C2973-PB (2.0MP)	MS-C4473-PB (4.0MP)
Camera	Image Sensor	1/3" Progressive Scan CMOS	
	Min. Illumination	Color:0.005Lux@F1.2 B/W:0Lux with IR on	Color:0.008Lux@F1.2 B/W:0Lux with IR on
	WDR	Ultra WDR up to 120dB	
	Lens	3.6mm @F1.6	
	Mount	M12	
	Field of View	H67.2°(3.6mm)	
	Shutter Time	1/100000s~1/5s	
	IR Distance	Up to 20m	
	Day&Night	ICR Filter Auto Switch	
Video	Max Image Resolution	1920×1080	2592×1520
	Frame Rate	30fps(1920×1080), 30fps(1280×960), 30fps(1280×720), 30fps (704 × 576)	20fps(2592×1520), 30fps(2304×1296), 30fps(1920×1080), 30fps(1280×960), 30fps(1280×720), 30fps (704 × 576)
	Video Compression	H.265(HEVC)/H.264/MJPEG	
	Video Bit Rate	16Kbps~16Mbps (CBR/VBR Adjustable)	
	Image Setting	Brightness/Contrast/Saturation/Sharpness	
Network	Ethernet	1 RJ45 10M/100M Ethernet port	
	Network Storage	NAS(Support NFS, SMB/CIFS)	
	Protocol	TCP/IP, UDP, RTP, RTSP, RTCP, HTTP, HTTPS, DNS, DDNS, DHCP, FTP, NTP, SMTP, SNMP, UPnP, SIP, IPv6, PPPoE, VLAN	
Audio	Audio Streaming	Built-in Microphone	
	Audio Compression	G.711/AAC	
System	Storage	Support Micro SD/SDHC/SDXC Local Storage, up to 64G	
	Advanced Function	Motion Detection, Privacy Masking, Backlight Compensation, 3D-DNR, ROI	
	SIP/VoIP Support	Yes, Voice & Video-over-IP	
	Event Trigger	Motion Detection, Network Disconnection etc.	
	Event Action	FTP upload/ SMTP upload/ SD card record/ SIP Phone	
	System Compatibility	ONVIF Profile S	
General	Working Temperature	-30℃~60℃	
	Working Humidity	0~90%(non-condensing)	
	Power Supply	PoE	
	Power Consumption	2.5W MAX	
		5W MAX (with IR on)	5.5W MAX (with IR on)
	Weather Proof	Up to IP67 rating for weather-resistant performance	
	Housing	Vandal-proof IK09-rated metal housing	
	Weight	500g	
	Dimensions	110.8mmX118.5mmX65mm	
	Warranty	2 years	

Note: MS-C2973-PB, P refers to POE, B refers to H.265

V6.07

Milesight Technology Co.,Ltd. | www.milesight.com



Add: No.23 Wanghai Road, 2nd Software Park, Xiamen, China
Tel: +86-592-5922772 Mail: sales@milesight.com

