


# HD-SDI / AHD (2MB,1.3MB) / 960H / SD 16CH Hybrid Standalone DVR

## KDR-HM16F32-H

Front & Rear Panel



Dimension

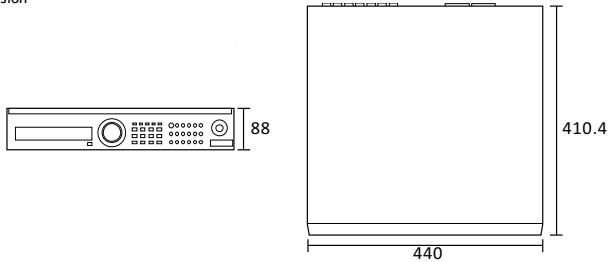

### Key Feature

- SET-UP WIZARD (Easy for Set-up)
- ANS(Auto Network Setting)
- POS/ATM
- NETWORK DUAL STREAMMING
- KEYBOARD CONTROLLER SUPPORT

## SPECIFICATION

Model	KDR-HM16F32-H
Type	HD-SDI Hybrid Standalone DVR
Codec	H.264 (Main Profile)
Recording Performance	1080p30 * 30 FPS * 16 CH = 320 FPS
Playback Performance	1920*1080 * 30 FPS * 16 CH = 320 FPS
Section	Hardware
Video Input Format	HD-SDI / AHD(2MB, 1.3MB) / 960H / SD
Video Input	16CH
Video Output	1 HDMI (Max. 1920 x 1080P), 1 VGA, 1 Composite
Audio Input	4 Inputs (RCA)
Audio Output	1 Output (RCA)
Audio Codec	ADPCM
Ethernet	1 Port (10 / 100 Mbps / 1 Gbps Ethernet (RJ-45))
PTZ port	1 Port (RS-485/422 Terminal Block)
Keyboard controller port	1 Port (RS-485/422 Terminal Block)
POS/ATM	4 Port (usb to serial)
Alarm Input / Output	4 (NC/NO) / 1 (Relay)
USB Port	4 Ports (2 x Front Panel, 2 x Rear Panel)
Storage	Up to 3+1(DVD/RW) / eSATA
ODD	1 CD/DVD RW(Optional)
Section	Software
Wizard Support	Wizard for Easy Setup
ANS support	Auto Network Setup Support
Recording Scheduling	Fully Programmable (by Weekday / by Hour / by Camera / by Continuous+ Event + PreEvent)
Network	Dual Stream ( User Selectable )
Recording Quality Level	Best / High / Moderate / Economic
Scheduling Mode	Continuous / Alarm / Motion / Panic ( Fully Programmable)
Pre-Event	Up to 30 Minutes
Motion Detection	Region Selection (Mouse dragging support)
Playback Speed	x1, x2, x4, x8, x16, x32, x64, x128
Backup Format	EXE(Self Executable Format), JPEG
Backup Devices	CD/DVD-RW / USB
GUI	User Friendly Interface
Time Zone	Yes
NTP	Yes
DDNS	Built-in ddns / dyndns / no-ip / zoneedit / freedns
Day Light Saving	Yes
Panic Recording	Yes
Multi Language	33 languages
CMS	Full Featured Enterprise Edition for Windows / Mac / Linux
Mobile Viewer	iPhone / Android / iPad
Operating System	Embedded Linux
Section	Dimension
Dimension(WxHxD)	440 mm x 88 mm x 410.4 mm / 17.32 inch x 3.46 inch x 16.15 inch
Operating Temperature & Humidity	5°C~40°C / 41°F~104°F, 0% ~ 90%
Power	Adaptor
Power consumption	MAX 60W

Re-Seller: SIN CHEW ALARM PTE LTD



10 Upper Aljunied Link #06-02/03/04  
Singapore 367904  
Tel: (65) 62872788 Fax: (65) 62870856  
Email: enquiry@sinchewalarm.com  
http://www.sinchewalarm.com