

MCP-040

4 Door Access Controller



Features



4 Door Control



Compatible with Sensors



Zone Alarm Monitoring



Setting on the Server via LAN



Detachable Terminal Blocks



Backup Battery



Compatible with Fingerprint Recognition Terminals and Wiegand Card Readers

Specification

Model	MCP-040 V2.0
Schedules	1,024
Event Logs	51,200
Max Users	50,000
Lock Interface	· EM, strike, auto door · 2 Locks, 2 relays or 2 locks, 4 relays (Option) · 2 Door status, 2 lock status · 2 Exit input port
Zone Interface	8 Zone (Each port dual use)
Bell Interface	Monitored bell/siren port (1 port)
CPU	32bits RISC processor (ARM Cortex-M3 Core)
LAN	10/100M Ethernet (Auto detecting)
Memory	8MB serial flash
Backup Battery	DC12V 7A (Option)
Communication Port	RS485 2 port, Wiegand 4 port (4 x IN), RS232 1 port (Debug)
Power Adapter	DC15V 6A
Display	Status LED
Operation Environment	-20 ~ 60℃ / Lower than 90% RH

Re-Seller: **SIN CHEW ALARM PTE LTD**



10 Upper Aljunied Link #06-02/03/04
Singapore 367904
Tel: (65) 62872788 Fax: (65) 62870856
Email: enquiry@sinchewalarm.com
http://www.sinchewalarm.com

Dummy Card Reader

VS-R20D

◆ Features



Compatible with MCP-040 Controller




Simple and Slim Design

IP65 Dust/Water Resistance
- Outdoor installation


3-Color High Luminance LED



◆ System Architecture with Fingerprint Recognition Terminals

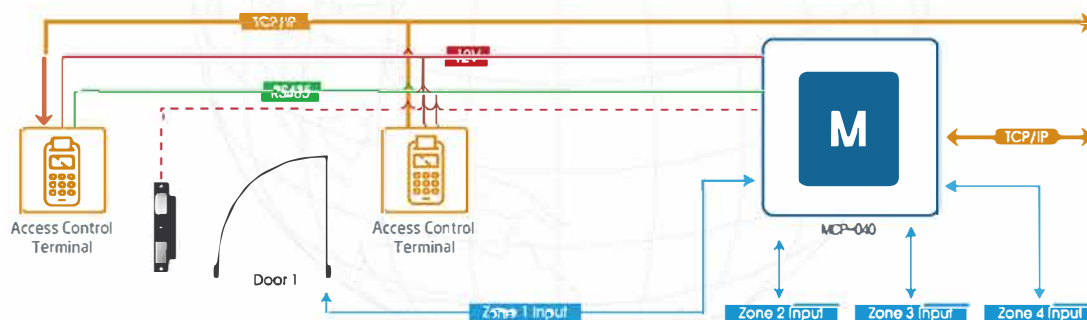

◆ System Architecture with Card Readers

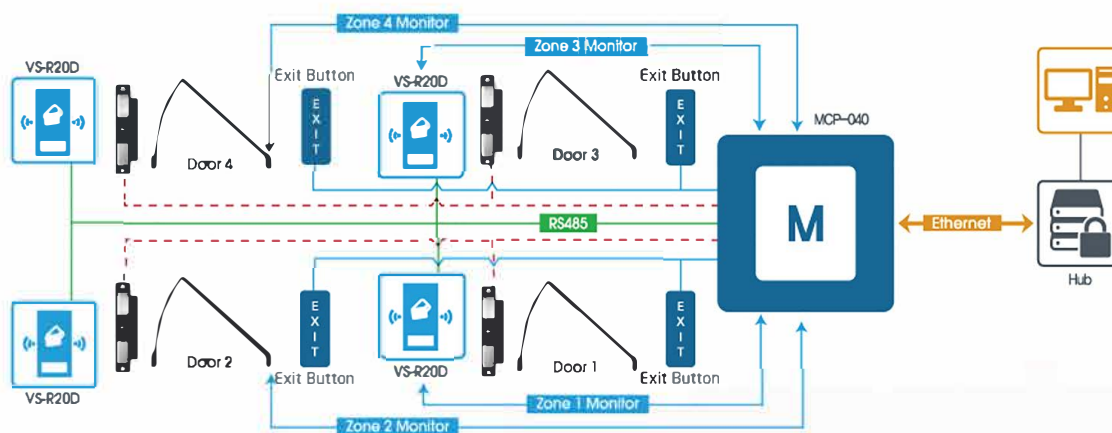Re-Seller: **SIN CHEW ALARM PTE LTD**

10 Upper Aljunied Link #06-02/03/04
Singapore 367904
Tel: (65) 62872788 Fax: (65) 62870856
Email: enquiry@sincchewalarm.com
http://www.sincchewalarm.com